

Features

- ▶ mini DisplayPort 1.1 / DVI for resolutions up to WUXGA / 1920x1200
- ▶ Gold plated precision contacts, unidirectional
- ▶ mini DisplayPort male to DVI-D Single Link (24+1) male
- ▶ High purity copper conductors and triple shielding
- ▶ 100% tested for professional AV applications

Connections

Connector Material	ABS Plastic
Contact Material	Gold-plated
Directionality	Unidirectional from mini DisplayPort Source to DVI Display, Active Signal Conversion
Connector 1	mini DisplayPort Male
Dimensions Connector 1	ca. 18.7 x 11 x 9 mm
Connector 2	DVI-D (24+1) Single Link Male
Dimensions Connector 2	ca. 41 x 58 x 16 mm

Cable



Type	Round Cable
Construction	5x Twisted Pairs 32AWG + 5x Single Conductors 32AWG + Drain
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Outer Diameter	4.8mm
Minimum Bend Radius	33.6mm
Tensile Strength	1.05 kgf / mm ²
Dielectric Strength	AC 500V / 1 Minute
Sheath Printing	Cable Standards, Max. Temperature, Combustion Class

Signal Transmission

Standard	DisplayPort 1.1, HBR 2 DVI-D Single Link with 18+1 Pins Connected
Bandwidth / Max. Resolution	4.95 Gbps / 2K WUXGA 1920x1200

General

Transmission Distance	Up to 3.00m
Operation Temperature	Up to 80°C
Colour	White / Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, ROHS, REACH, WEEE, VW-1

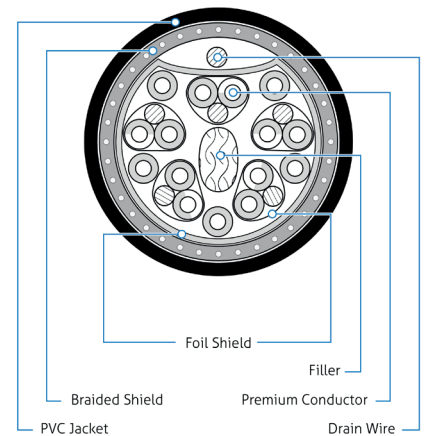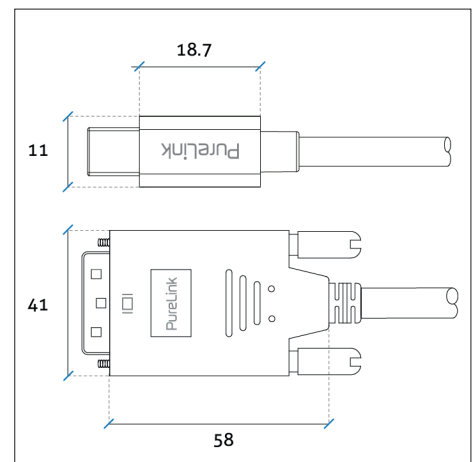

IS2110 / IS2111 Overview

Parent	Art. No.	Length	Colour	EAN
IS2110	IS2110-010	1.00m	white	4251364728291
	IS2110-015	1.50m	white	4251364728307
	IS2110-020	2.00m	white	4251364728314
	IS2110-030	3.00m	white	4251364728321
IS2111	IS2111-010	1.00m	black	4251364728574
	IS2111-015	1.50m	black	4251364728581
	IS2111-020	2.00m	black	4251364728598
	IS2111-030	3.00m	black	4251364728604

