

SUBWOOFERS

SUB 10 DUAL


Technical Sheet



SPECIFICATIONS

Nominal power	250W RMS
Maximum power	500W
Sensitivity	85dB
Nom. impedance	4 Ω + 4 Ω
Cone	Polypropylene
Surround	Butyl
VC diameter	50mm 1"
Net weight	4.5kg

FREQUENCY RESPONSE/IMPEDANCE

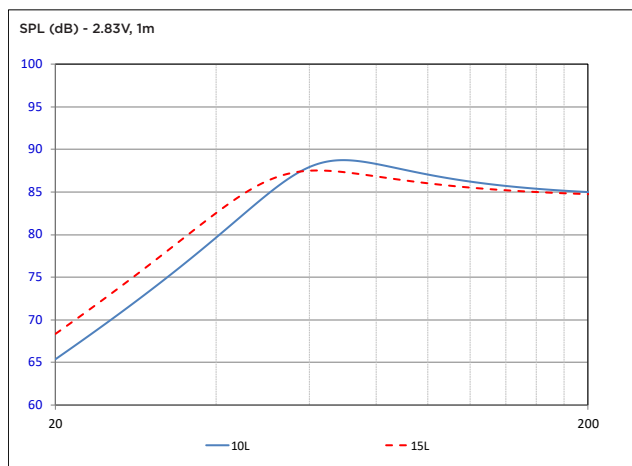

PARAMETERS

Rdc	3.5 Ω + 3.5 Ω
Fs	25Hz
Mms	110g
Cms	0.35mm/N
Vas	49L
Qts	0.654
Qes	0.748
Qms	5.208
Bxl	6.5 N/A
Sd	314cm ²

MECHANICAL DRAWING

