

# SUBWOOFERS

## SUB 12 SLIM


Technical Sheet



### SPECIFICATIONS

Nominal power	280W RMS	
Maximum power	560W	
Sensitivity	87dB	
Nom. impedance	4 Ω	
Cone	Polypropylene	
Surround	Butyl	
VC diameter	20mm	13/16"
Net weight	5kg	

### FREQUENCY RESPONSE/IMPEDANCE

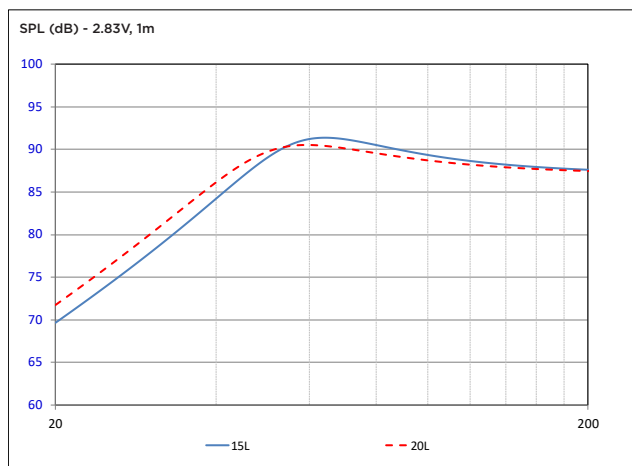

### PARAMETERS

Rdc	3.2 Ω
Fs	24Hz
Mms	200g
Cms	0.2mm/N
Vas	62L
Qts	0.687
Qes	0.764
Qms	6.882
Bxl	11.5 N/A
Sd	471cm <sup>2</sup>

### MECHANICAL DRAWING

