

SUBWOOFER



Series



THOR-Vi IN-WALL HOME CINEMA SUBWOOFER

Experience the next evolution of our award-winning THOR series: introducing the THOR-Vi, the Ultimate Cinema Subwoofer. Elevate your home theater with this masterpiece that delivers unrivaled power and breathtaking low-frequency effects, all in a subtle, unobtrusive design that blends seamlessly into any space.

The THOR-Vi is equipped with a custom-engineered 12" long-excursion woofer, meticulously designed for the ultimate audio experience. With its remarkably slim profile, the THOR-Vi is effortlessly integrated into your walls, providing a discreet yet commanding presence.

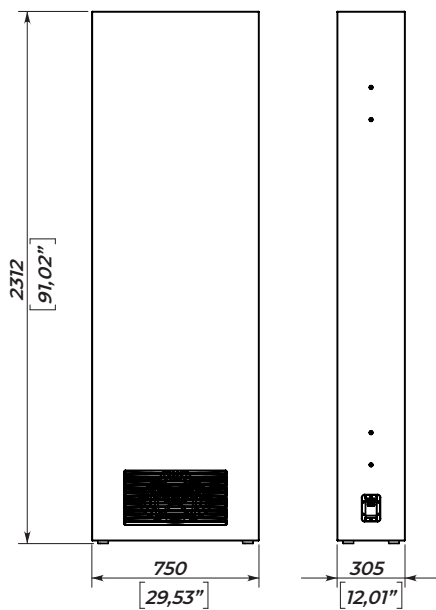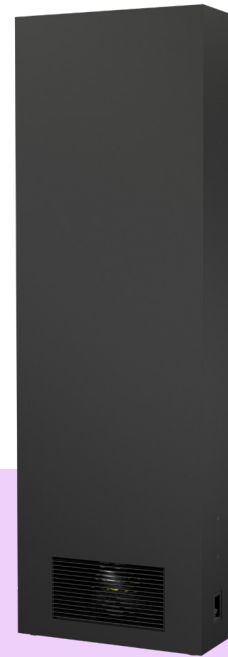

SAFETY INSTRUCTIONS

1. Do not pour liquids on the speaker system - this may cause driver cone destruction and an unappealing speaker appearance. Do not allow direct sunlight on the speaker cone - this will reduce its resource dramatically. For fire safety do not install the speaker system near open flames or heating elements.
2. Do not use the speaker system with the damaged connector or speaker cable - this is an electric shock hazard and fire hazard.
3. Make sure the speaker system is firmly set up on the ceiling, stage, or wall (where applicable).
4. While setting the speaker system up on a slope or slippery surface, make necessary arrangements to avoid its movement due to its vibration.
5. This loudspeaker system is capable of delivering a significant sound pressure level. To avoid permanent or temporary hearing damage or loss, prolonged exposure to sound pressure levels exceeding values over 90 dB should be limited.

SPECIFICATIONS

Frequency response (± 3 dB)	17 - 160 Hz
Frequency range (-10 dB)	15 - 200 Hz
Max continuous SPL	124 dB
Sensitivity (1W/1m half-space)	96 dB
Low-frequency woofer	12-inch (4-inch voice coil) ridged glass-fiber reinforced enclosure
Nominal impedance	4 Ohm
Power rating	600 W
Connectors	Banana terminal
Dimension (W x H x D)	750 x 2312 x 305 mm
Net weight	88,6 kg

CONNECTIONS

Use a Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in the input signal.

Do not exceed the input powers, abovementioned in the specifications, while exploiting the speaker system.

The speaker system comes with banana terminals for connection to the amplifier.

CTA-2010 RESULTS

Model	Driver	Loading	Parametr									
THOR-Vi	12"	ported	Freq, Hz	80	63	50	40	31,5	25	20	18	16
			SPL, dB	116,8 (amp limiter)	114,4 (amp limiter)	118,7 (amp limiter)	116,8 (amp limiter)	117,5	118	118	114	109